

VersaCheck® Beverage Applications

ASSE 1024 • ASSE 1032 • NSF 61 • NSF 372




0.25" FNPT

VCB025-A..... Hardcoat Anodized Aluminum
VCB025-PPVC

	5 PSI Drop	10 PSI Drop	18 PSI Drop
GPM	5.87	9.69	13.11
LPM	22.22	36.68	49.63

- ASSE 1024 Minimum Flow Rate @ 10 psi Drop: 3.0 GPM (11.4 LPM)
- ◆ ASSE 1032 Minimum Flow Rate @ 18 psi Drop: 1.0 GPM (3.79 LPM)

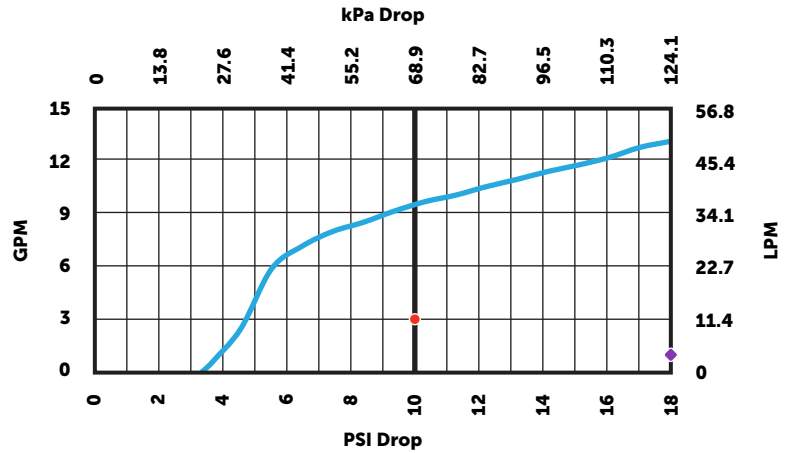

0.375" FNPT

VCB038-A..... Hardcoat Anodized Aluminum
VCB038-PPVC

	5 PSI Drop	10 PSI Drop	18 PSI Drop
GPM	8.31	12.34	16.82
LPM	31.46	46.71	63.67

- ASSE 1024 Minimum Flow Rate @ 10 psi Drop: 6.0 GPM (22.7 LPM)
- ◆ ASSE 1032 Minimum Flow Rate @ 18 psi Drop: 2.0 GPM (7.57 LPM)

